



Axial Fan

UF15KME Series

Frame/Housing: Aluminum die-casting

Impeller: Plastic PBT PC, nylon or metal

Bearing System: Ball bearing or sleeve bearing

Motor: Shaded pole or capacitor start-run

Connection: Lead wire or terminal type

Protection: Impedance-Protected or Thermally-Protected

Dielectric withstand voltage: Above 10MΩ, DC500V



Life Expectancy: Ball bearing: Over 40,000 hr. (at 40°C)
Sleeve bearing: Over 15,000 hr. (at 40°C)

Safety Approval: CUL, CE, TUV, either UL or ETL

Description of Model No.

UF	12	A	(R)	11	B	T	H	N
1	2	3	4	5	6	7	8	9

	UF15KME11-H	UF15KME23-H
Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	42/42 W	42/42 W
Rated Current	0.51/0.46 A	0.25/0.23 A
Locked Current	0.87/0.74 A	0.43/0.37 A
Speed	2800/3250 RPM	2800/3250 RPM
Maximum Air Flow	5.5/6.5 m ³ /min.	5.5/6.5 m ³ /min.
Maximum Air Flow	195/230 CFM	195/230 CFM
Maximum Pressure	14/16 mmH ₂ O	14/16 mmH ₂ O
Maximum Pressure	0.55/0.63 InchH ₂ O	0.55/0.63 InchH ₂ O
Noise	45/50 dB	45/50 dB
Weights	0.91 kg	0.91 kg

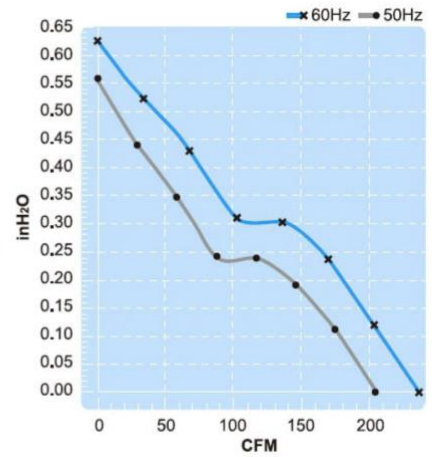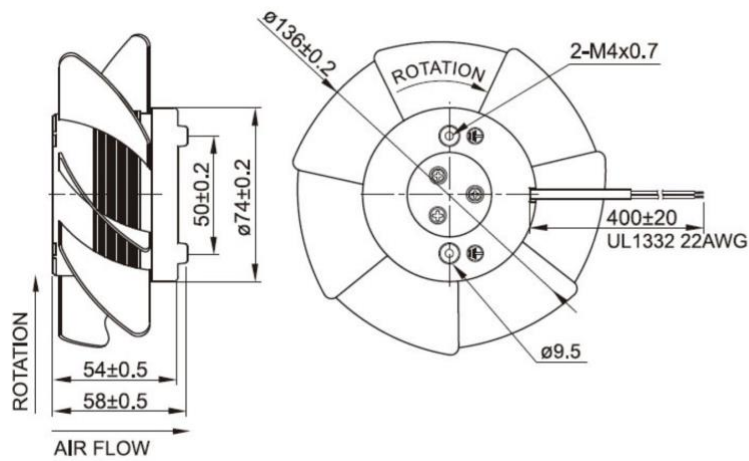

SAFETY APPROVAL

