





Axial Fan

UF25GCE Series

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic PBT PC, nylon or metal
Bearing System:	Ball bearing or sleeve bearing
Motor:	Shaded pole or capacitor start-run
Connection:	Lead wire or terminal type
Protection:	Impedance-Protected or Thermally-Protected
Dielectric withstand voltage:	Above 10MΩ, DC500V
Life Expectancy:	Ball bearing: Over 40,000 hr. (at 40°C) Sleeve bearing: Over 15,000 hr. (at 40°C)
Safety Approval:	CUL, CE, TUV, either UL or ETL
Description of Model No.	UF 12 A (R) 11 B T H N
	1 2 3 4 5 6 7 8 9

	UF25GCE11-H	UF25GCE23-H
Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	36/39 W	36/39 W
Rated Current	0.3/0.29 A	0.14/0.14 A
Locked Current	0.53/0.51 A	0.26/0.25 A
Speed	1400/1650 RPM	1400/1650 RPM
Maximum Air Flow	13/15.5 m3/min.	13/15.5 m3/min.
Maximum Air Flow	460/550 CFM	460/550 CFM
Maximum Pressure	8/10 mmH2O	8/10 mmH2O
Maximum Pressure	0.32/0.4 InchH2O	0.32/0.4 InchH2O
Noise	52/55 dB	52/55 dB
Weights	1.4 kg	1.4 kg

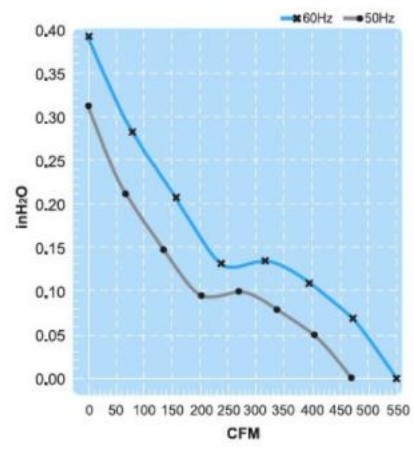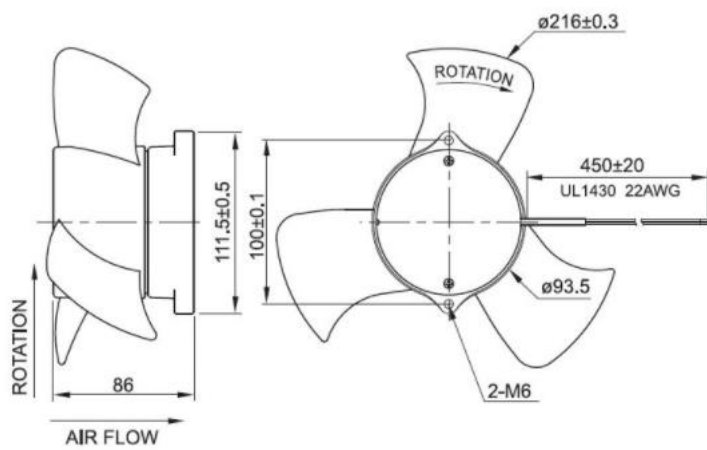

SAFETY APPROVAL

