







EC fan

UFT200BMB Series

| | |
|-------------------------------|---|
| Frame/Housing: | Aluminum die-casting |
| Impeller: | Plastic or steel |
| Bearing System: | Ball bearing |
| Motor: | Brushless DC motor |
| Protection: | Electronically-Protected |
| Insulation Resistance: | Above 10MΩ, DC500V |
| Dielectric withstand voltage: | AC 1,500V (50/60Hz) one minute |
| Life Expectancy: | Ball bearing: Over 50,000 hr. (at 40°C) |
| Safety Approval: | CE . |
| Description of Model No. | UF 220 A P A 11 H1 C 2 A |
| | 1 2 3 4 5 6 7 8 9 10 |

| | UFT200BMB11H1D4A | UFT200BMB23H1D4A |
|------------------|-------------------|-------------------|
| Rated Voltage | 115 V | 230 V |
| Frequency | 50/60/50/60 Hz | 50/60/50/60 Hz |
| Input Power | 26/8.1 W | 27.0/8.5 W |
| Rated Current | 0.40/0.13 A | 0.24/0.08 A |
| Locked Current | 0.1/0.1 A | 0.1/0.1 A |
| Speed | 2200/1400 RPM | 2200/1400 RPM |
| Maximum Air Flow | 13.0/8.2 m3/min. | 13.0/8.2 m3/min. |
| Maximum Air Flow | 460/290 CFM | 460/290 CFM |
| Maximum Pressure | 11.7/7.1 mmH2O | 11.7/7.1 mmH2O |
| Maximum Pressure | 0.46/0.28 InchH2O | 0.46/0.28 InchH2O |
| Noise | 55/44 dB | 55/44 dB |
| Weights | 1 kg | 1 kg |

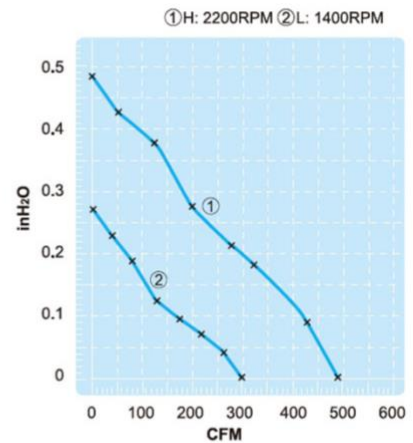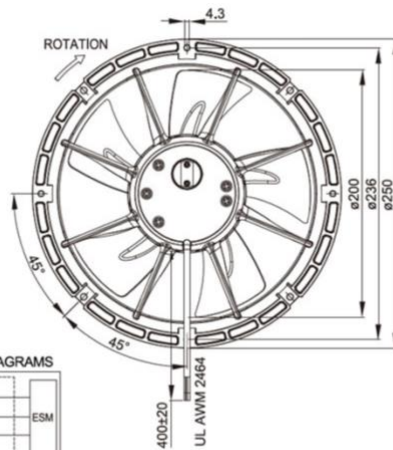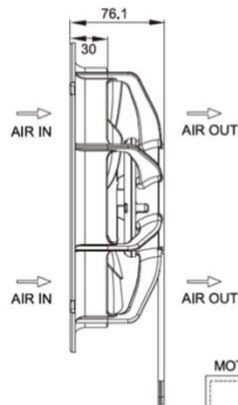

SAFETY APPROVAL

