






Axial Fan

UF15KMRE Series

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic PBT PC,nylon or metal
Bearing System:	Ball bearing or sleeve bearing
Motor:	Shaded pole or capacitor start-run
Connection:	Lead wire or termnal type
Protection:	Impedance-Protected or Thermally-Protected
Dielectric withstand voltage:	Above 10MΩ, DC500V
Life Expectancy:	Ball bearing:Over 40,000 hr.(at 40°C) Sleeve bearing:Over 15,000 hr.(at 40°C)
Safety Approval:	CUL, CE, TUV, either UL or ETL
Description of Model No.	UF 12 A (R) 11 B T H N
	1 2 3 4 5 6 7 8 9

	UF15KMRE11-H	UF15KMRE23-H
Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	45/45 W	45/45 W
Rated Current	0.54/0.51 A	0.27/0.25 A
Locked Current	0.9/0.8 A	0.44/0.38 A
Speed	2750/3150 RPM	2750/3150 RPM
Maximum Air Flow	6.4/7.2 m ³ /min.	6.4/7.2 m ³ /min.
Maximum Air Flow	225/255 CFM	225/255 CFM
Maximum Pressure	12.5/12.5 mmH ₂ O	12.5/12.5 mmH ₂ O
Maximum Pressure	0.5/0.5 InchH ₂ O	0.5/0.5 InchH ₂ O
Noise	54/57 dB	54/57 dB
Weights	0.85 kg	0.85 kg

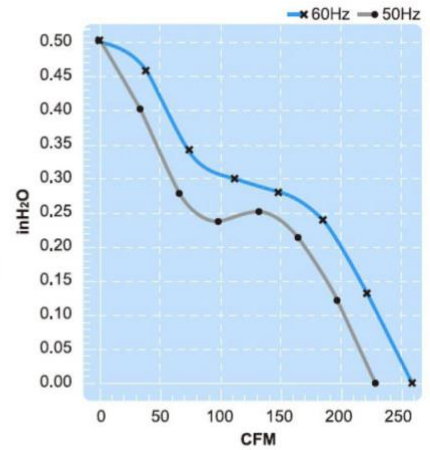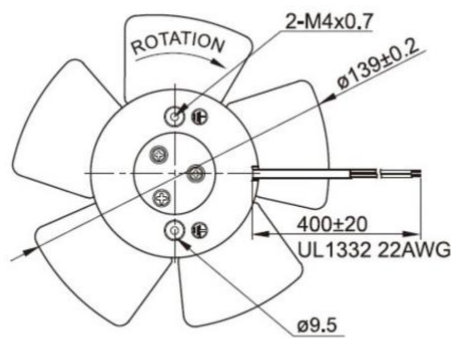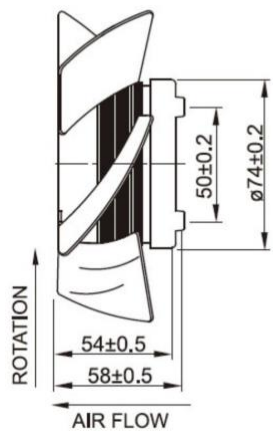

SAFETY APPROVAL

