




EC fan

UFT25GBP Series

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic or steel
Bearing System:	Ball bearing
Motor:	Brushless DC motor
Protection:	Electronically-Protected
Insulation Resistance:	Above 10MΩ, DC500V
Dielectric withstand voltage:	AC 1,500V (50/60Hz) one minute
Life Expectancy:	Ball bearing: Over 50,000 hr. (at 40°C)
Safety Approval:	CE .
Description of Model No.	UF 220 A P A 11 H1 C 2 A
	1 2 3 4 5 6 7 8 9 10

	UFT25GPPB11H1D8A	UFT25GPPB23H1D8A	UFT25GPPB0AL1D8A
Rated Voltage	115V	230 V	115V~230 V
Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Input Power	75W	72W	72W
Rated Current	1.05	0.64	0.35(115VAC) 0.21(230VAC)
Locked Current	0.15	0.15	0.14(115VAC) 0.16(230VAC)
Speed	2750	2750	1700
Maximum Air Flow	23.5	23.5	14.2
Maximum Air Flow	830	830	500
Maximum Pressure	30.5	30.5	12.2
Maximum Pressure	1.20	1.20	0.48
Noise	70	70	56
Weights	2.09 kg	2.09 kg	2.09 kg

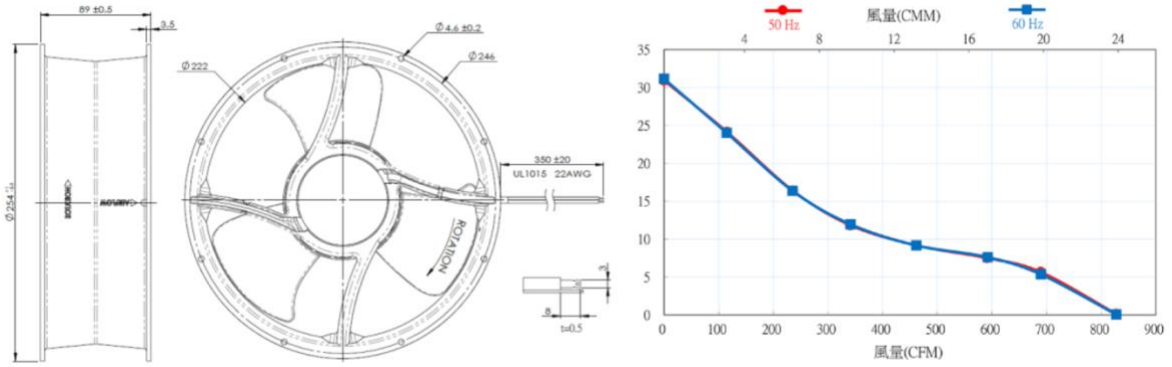

SAFETY APPROVAL

