




## Axial Fan

# UF20JC Series

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic PBT PC,nylon or metal
Bearing System:	Ball bearing or sleeve bearing
Motor:	Shaded pole or capacitor start-run
Connection:	Lead wire or termnal type
Protection:	Impedance-Protected or Thermally-Protected
Dielectric withstand voltage:	Above 10MΩ, DC500V
Life Expectancy:	Ball bearing:Over 40,000 hr.(at 40°C) Sleeve bearing:Over 15,000 hr.(at 40°C)
Safety Approval:	CUL, CE, TUV, either UL or ETL
Description of Model No.	UF 12 A (R) 11 B T H N
	1 2 3 4 5 6 7 8 9

	UF20JC11-H	UF20JC23-H
Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	70/98 W	70/98 W
Rated Current	0.62/0.9 A	0.32/0.45 A
Locked Current	1.22/1.22 A	0.6/0.61 A
Speed	2800/3200 RPM	2800/3200 RPM
Maximum Air Flow	17/19.3 m3/min.	17/19.3 m3/min.
Maximum Air Flow	600/680 CFM	600/680 CFM
Maximum Pressure	20.3/19.8 mmH2O	20.3/19.8 mmH2O
Maximum Pressure	0.8/0.77 InchH2O	0.8/0.77 InchH2O
Noise	67/71 dB	67/71 dB
Weights	2.4 kg	2.4 kg

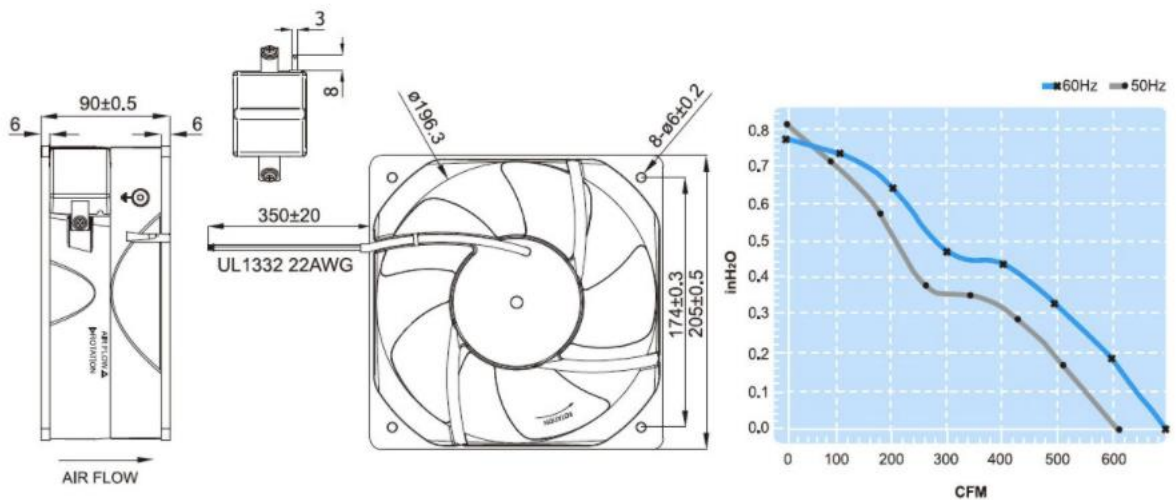

SAFETY APPROVAL

