




Centrifugal Fan
UF190APA Series

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic or steel
Bearing System:	Ball bearing
Motor:	Shaded pole or capacitor start-run
Protection:	Impedance-Protected or Thermally-Protected or Electronically-Protected
Insulation Resistance:	Above 100MΩ, DC500V.
Dielectric withstand voltage	AC 1,500V (50/60Hz) one minute
Life Expectancy:	Ball bearing: Over 40,000 hr. (at 40°C)
Safety Approval:	CUL, CE, TUV, either UL or ETL.
Description of Model No.	UF 220 A P A 11 H1 C 2 A
	1 2 3 4 5 6 7 8 9 10

UF190APA11H1C2A

UF190APA23H1C2A

Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	55/65 W	57/72 W
Rated Current	0.45/0.54 A	0.23/0.3 A
Locked Current	0.92/0.91 A	0.43/0.45 A
Speed	2500/2700 RPM	2500/2700 RPM
Maximum Air Flow	9.5/10.4 m ³ /min.	9.5/10.4 m ³ /min.
Maximum Air Flow	335/370 CFM	335/370 CFM
Maximum Pressure	25/30 mmH2O	25/30 mmH2O
Maximum Pressure	1/1.2 Inch	1/1.2 Inch
Noise	60/63 dB	60/63 dB
Weights	1.2 kg	1.2 kg

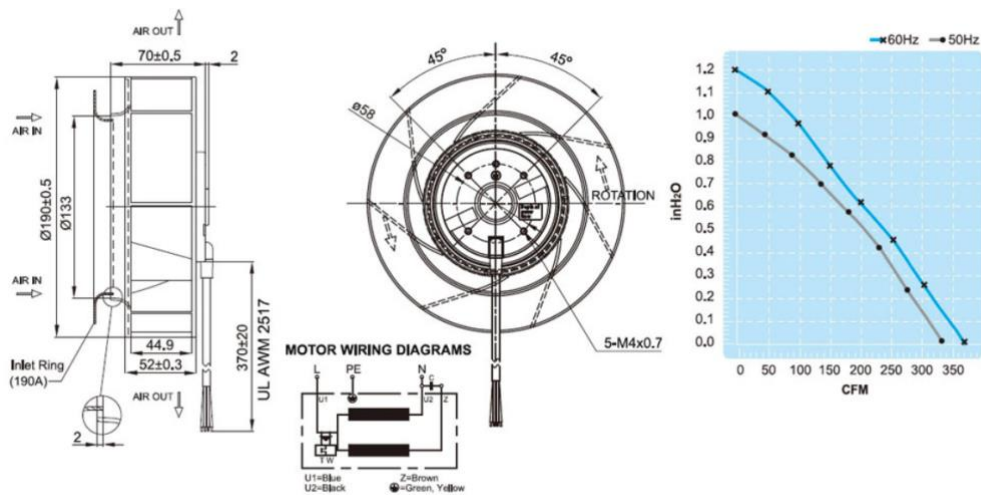

SAFETY APPROVAL

