




External Rotor Axial Fan **UF180BAB Series**

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic or steel
Bearing System:	Ball bearing
Motor:	Shaded pole or capacitor start-run
Protection:	Impedance-Protected or Thermally-Protected or Electronically-Protected
Insulation Resistance:	Above 100MΩ, DC500V.
Dielectric withstand voltage	AC 1,500V (50/60Hz) one minute
Life Expectancy:	Ball bearing: Over 40,000 hr. (at 40°C)
Safety Approval:	CUL, CE, TUV, either UL or ETL.
Description of Model No.	UF 220 A P A 11 H1 C 2 A
	1 2 3 4 5 6 7 8 9 10

	UF180BAB11H1C2A	UF180BAB23H1C2A
Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	76/75 W	76/75 W
Rated Current	0.7/0.71 A	0.35/0.4 A
Locked Current	1.23/1.23 A	0.54/0.54 A
Speed	2750/3100 RPM	2750/3100 RPM
Maximum Air Flow	9.5/11 m ³ /min.	9.5/11 m ³ /min.
Maximum Air Flow	335/388 CFM	335/388 CFM
Maximum Pressure	7.5/10 mmH2O	7.5/10 mmH2O
Maximum Pressure	0.3/0.4 InchH2O	0.3/0.4 InchH2O
Noise	62/65 dB	62/65 dB
Weights	1.2 kg	1.2 kg

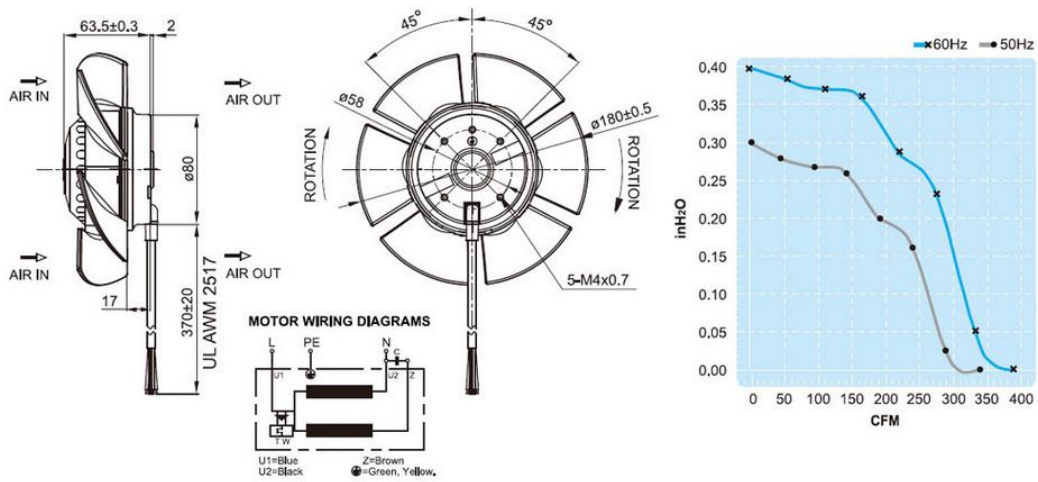

SAFETY APPROVAL

