




Cross Flow Fan
UF9060 Series

Frame:	Steel with black painting
Impeller:	Plastic & Aluminum
Bearing System:	Ball bearing or sleeve bearing
Motor:	Capacitor start-run or Shaded pole
Protection:	Impedance-Protected or Thermally-Protected
Insulation Resistance:	Above 100MΩ,DC 500V.
Dielectric Withstand Voltage	AC1, 500V (50/60Hz) one minute
Safety Approval:	CE, TUV. (UF9029 has UL, CUL approval)
Description of Model No.	UF 12 A (R) 11 B T H N
	1 2 3 4 5 6 7 8 9

	UF9060CBP12HL	UF9060CBP23HL
Rated Voltage	120 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	130/160 W	130/160 W
Rated Current	1/1.25 A	0.55/0.7 A
Locked Current	1.4/1.4 A	0.75/0.75 A
Speed	2150/2100 RPM	2150/2100 RPM
Maximum Air Flow	15.5/15 m ³ /min.	15.5/15 m ³ /min.
Maximum Air Flow	550/530 CFM	550/530 CFM
Maximum Pressure	9/11 mmH2O	9/11 mmH2O
Maximum Pressure	0.35/0.43 InchH2O	0.35/0.43 InchH2O
Noise	55/54 dB	55/54 dB
Weights	6 kg	6 kg

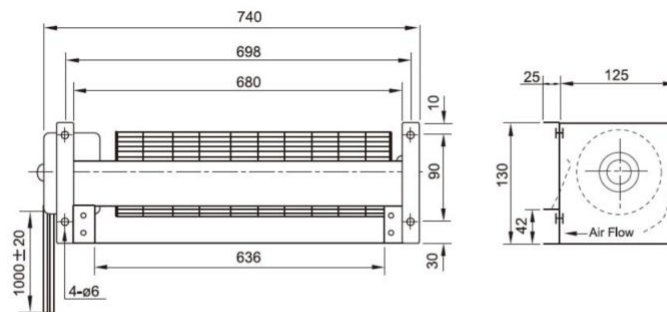

SAFETY APPROVAL

