

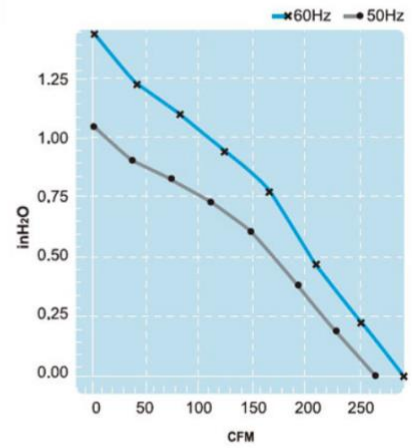



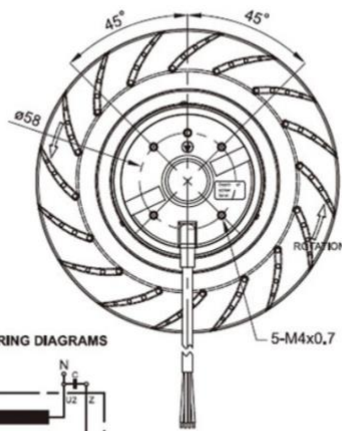

Centrifugal Fan
UF180(55)APA Series

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic or steel
Bearing System:	Ball bearing
Motor:	Shaded pole or capacitor start-run
Protection:	Impedance-Protected or Thermally-Protected or Electronically-Protected
Insulation Resistance:	Above 100MΩ, DC500V.
Dielectric withstand voltage	AC 1,500V (50/60Hz) one minute
Life Expectancy:	Ball bearing: Over 40,000 hr. (at 40°C)
Safety Approval:	CUL, CE, TUV, either UL or ETL.
Description of Model No.	UF 220 A P A 11 H1 C 2 A
	1 2 3 4 5 6 7 8 9 10

	UF180(55)APA11H2C2	UF180(55)APA23H2C2A
Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	63/78 W	63/78 W
Rated Current	0.6/0.7 A	0.3/0.34 A
Locked Current	0.92/0.95 A	0.46/0.48 A
Speed	2550/2800 RPM	2550/2800 RPM
Maximum Air Flow	7.5/8.3 m ³ /min.	7.5/8.3 m ³ /min.
Maximum Air Flow	265/290 CFM	265/290 CFM
Maximum Pressure	26/36 mmH2O	26/36 mmH2O
Maximum Pressure	1/1.4 InchH2O	1/1.4 InchH2O
Noise	64/67 dB	64/67 dB
Weights	1.2 kg	1.2 kg

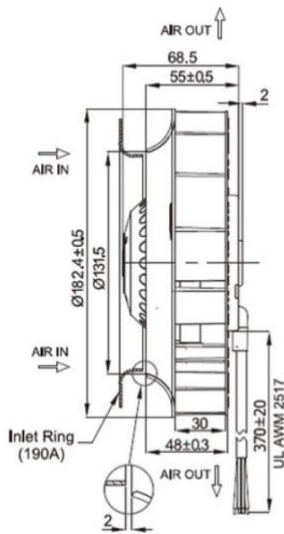

SAFETY APPROVAL

