




Cross Flow Fan  
**UF6017 Series**

Frame:	Steel with black painting
Impeller:	Plastic & Aluminum
Bearing System:	Ball bearing or sleeve bearing
Motor:	Capacitor start-run or Shaded pole
Protection:	Impedance-Protected or Thermally-Protected
Insulation Resistance:	Above 100MΩ,DC 500V.
Dielectric Withstand Voltage	AC1, 500V (50/60Hz) one minute
Safety Approval:	CE, TUV. (UF9029 has UL, CUL approval)

Description of Model No.	UF	12	A	(R)	11	B	T	H	N
	1	2	3	4	5	6	7	8	9

	UF6017SBA12HL	UF6017SBA23HL	UF6017SBA12ML
Rated Voltage	120 V	230 V	120 V
Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Input Power	27/25 W	27/25 W	27/25 W
Rated Current	0.45/0.42 A	0.22/0.2 A	0.30/0.28 A
Locked Current	0.55/0.47 A	0.26/0.22 A	0.37/0.30 A
Speed	2400/2500 RPM	2300/2400 RPM	2350/2000 RPM
Maximum Air Flow	2.5/2.7 m <sup>3</sup> /min.	2.4/2.5 m <sup>3</sup> /min.	2.5/2.0 m <sup>3</sup> /min.
Maximum Air Flow	90/95 CFM	85/90 CFM	88/72 CFM
Maximum Pressure	3.5/3.7 mmH2O	3.3/3.5 mmH2O	3.5/2.8 mmH2O
Maximum Pressure	0.19/0.25 InchH2O	0.15/0.21 InchH2O	0.19/0.24 InchH2O
Noise	51/52 dB	47/48 dB	38/38 dB
Weights	1.6 kg	1.6 kg	1.6 kg

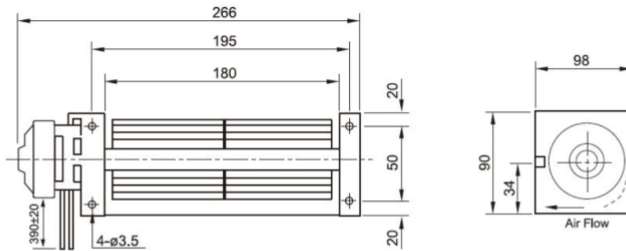

## SAFETY APPROVAL

