


Cross Flow Fan
UF9439 Series

Frame:	Steel with black painting
Impeller:	Plastic & Aluminum
Bearing System:	Ball bearing or sleeve bearing
Motor:	Capacitor start-run or Shaded pole
Protection:	Impedance-Protected or Thermally-Protected
Insulation Resistance:	Above 100MΩ,DC 500V.
Dielectric Withstand Voltage	AC1, 500V (50/60Hz) one minute
Safety Approval:	CE, TUV. (UF9029 has UL, CUL approval)

Description of Model No.	UF	12	A	(R)	11	B	T	H	N
	1	2	3	4	5	6	7	8	9

	UF9439CBP12HL	UF9439CBP12HL
Rated Voltage	120 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	43/50 W	43/50 W
Rated Current	0.4/0.4 A	0.2/0.22 A
Locked Current	0.6/0.6 A	0.31/0.31 A
Speed	1400/1600 RPM	1400/1600 RPM
Maximum Air Flow	7.5/9 m ³ /min.	7.5/9 m ³ /min.
Maximum Air Flow	265/318 CFM	265/318 CFM
Maximum Pressure	3.5/4.5 mmH2O	3.5/4.5 mmH2O
Maximum Pressure	0.14/0.18 InchH2O	0.14/0.18 InchH2O
Noise	48/53 dB	48/53 dB
Weights	3.5 kg	3.5 kg

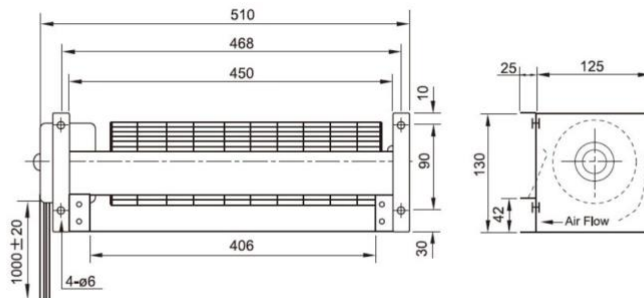

SAFETY APPROVAL

