




Centrifugal Fan **UF400AAA Series**

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic or steel
Bearing System:	Ball bearing
Motor:	Shaded pole or capacitor start-run
Protection:	Impedance-Protected or Thermally-Protected or Electronically-Protected
Insulation Resistance:	Above 100MΩ, DC500V.
Dielectric withstand voltage	AC 1,500V (50/60Hz) one minute
Life Expectancy:	Ball bearing: Over 40,000 hr. (at 40°C)
Safety Approval:	CUL, CE, TUV, either UL or ETL.
Description of Model No.	UF 220 A P A 11 H1 C 2 A
	1 2 3 4 5 6 7 8 9 10

UF400AAA23H1C4A

Rated Voltage	230 V
Frequency	50 Hz
Input Power	287 W
Rated Current	1.26 A
Locked Current	1.7 A
Speed	1250 RPM
Maximum Air Flow	53.8 m3/min.
Maximum Air Flow	1900 CFM
Maximum Pressure	49.7 mmH2O
Maximum Pressure	1.96 InchH2O
Noise	73 dB
Weights	5.45 kg

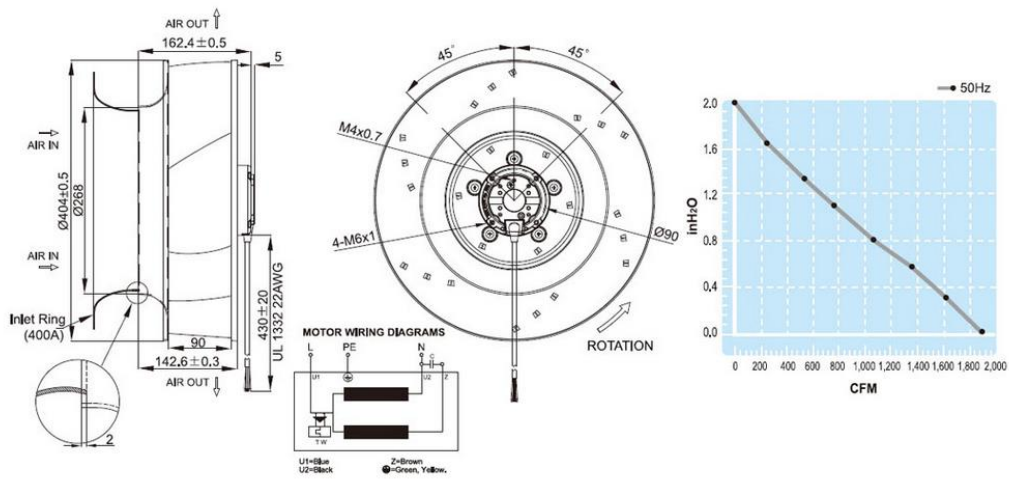

SAFETY APPROVAL

