

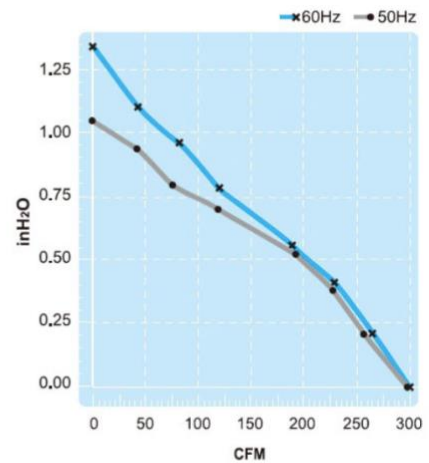


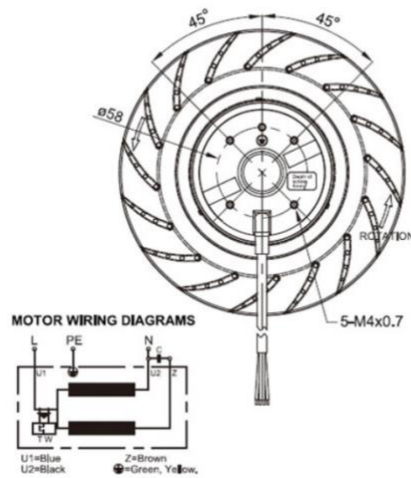

Centrifugal Fan
UF180APA Series

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic or steel
Bearing System:	Ball bearing
Motor:	Shaded pole or capacitor start-run
Protection:	Impedance-Protected or Thermally-Protected or Electronically-Protected
Insulation Resistance:	Above 100MΩ, DC500V.
Dielectric withstand voltage	AC 1,500V (50/60Hz) one minute
Life Expectancy:	Ball bearing: Over 40,000 hr. (at 40°C)
Safety Approval:	CUL, CE, TUV, either UL or ETL.
Description of Model No.	UF 220 A P A 11 H1 C 2 A
	1 2 3 4 5 6 7 8 9 10

	UF180APA11H1C2A	UF180APA23H1C2A
Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	70/83 W	70/81 W
Rated Current	0.62/0.75 A	0.3/0.35 A
Locked Current	0.86/0.93 A	0.41/0.44 A
Speed	2300/2400 RPM	2300/2400 RPM
Maximum Air Flow	8.5/8.5 m ³ min.	8.5/8.5 m ³ min.
Maximum Air Flow	300/300 CFM	300/300 CFM
Maximum Pressure	25/34 mmH2O	25/34 mmH2O
Maximum Pressure	1/1.3 InchH2O	1/1.3 InchH2O
Noise	63/63 dB	63/63 dB
Weights	1.4 kg	1.4 kg

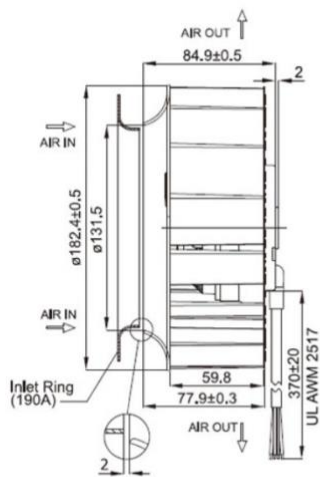

SAFETY APPROVAL

