




Centrifugal Fan **UF318AAA Series**

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic or steel
Bearing System:	Ball bearing
Motor:	Shaded pole or capacitor start-run
Protection:	Impedance-Protected or Thermally-Protected or Electronically-Protected
Insulation Resistance:	Above 100MΩ, DC500V.
Dielectric withstand voltage	AC 1,500V (50/60Hz) one minute
Life Expectancy:	Ball bearing: Over 40,000 hr. (at 40°C)
Safety Approval:	CUL, CE, TUV, either UL or ETL.

Description of Model No.	UF	220	A	P	A	11	H1	C	2	A
	1	2	3	4	5	6	7	8	9	10

	UF318AAA11H1C4A	UF318AAA23H1C4A
Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	115/155 W	115/155 W
Rated Current	1.1/1.4 A	0.6/0.68 A
Locked Current	2.6/2.4 A	1.43/1.31 A
Speed	1390/1580 RPM	1390/1580 RPM
Maximum Air Flow	28.7/33 m ³ /min.	28.7/33 m ³ /min.
Maximum Air Flow	1015/1165 CFM	1015/1165 CFM
Maximum Pressure	30.5/40.6 mmH2O	30.5/40.6 mmH2O
Maximum Pressure	1.2/1.6 InchH2O	1.2/1.6 InchH2O
Noise	63/66 dB	63/66 dB
Weights	3.9 kg	3.9 kg

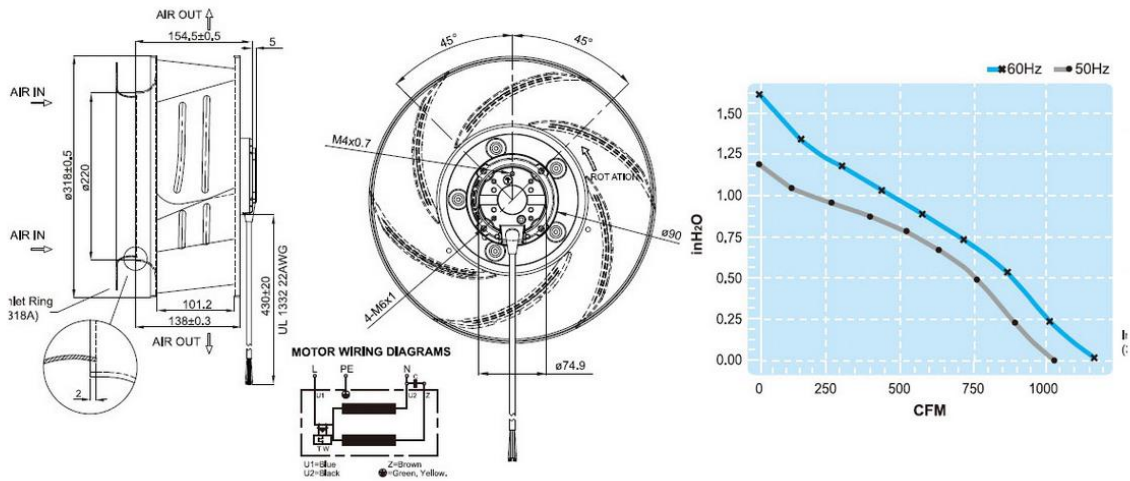

SAFETY APPROVAL

