




## Centrifugal Fan **UF360AAA Series**

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic or steel
Bearing System:	Ball bearing
Motor:	Shaded pole or capacitor start-run
Protection:	Impedance-Protected or Thermally-Protected or Electronically-Protected
Insulation Resistance:	Above 100MΩ, DC500V.
Dielectric withstand voltage	AC 1,500V (50/60Hz) one minute
Life Expectancy:	Ball bearing: Over 40,000 hr. (at 40°C)
Safety Approval:	CUL, CE, TUV, either UL or ETL.

Description of Model No.	UF	220	A	P	A	11	H1	C	2	A
	1	2	3	4	5	6	7	8	9	10

	UF360AAA11H1C4A	UF360AAA23H1C4A
Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	190/270 W	190/265 W
Rated Current	1.7/2.3 A	0.9/1.2 A
Locked Current	4.24/4 A	2.12/2 A
Speed	1400/1600 RPM	1400/1600 RPM
Maximum Air Flow	40.5/46.5 m <sup>3</sup> /min.	40.5/46.5 m <sup>3</sup> /min.
Maximum Air Flow	1430/1645 CFM	1430/1645 CFM
Maximum Pressure	40/55 mmH <sub>2</sub> O	40/55 mmH <sub>2</sub> O
Maximum Pressure	1.6/2.2 InchH <sub>2</sub> O	1.6/2.2 InchH <sub>2</sub> O
Noise	66/70 dB	66/70 dB
Weights	5.1 kg	5.1 kg

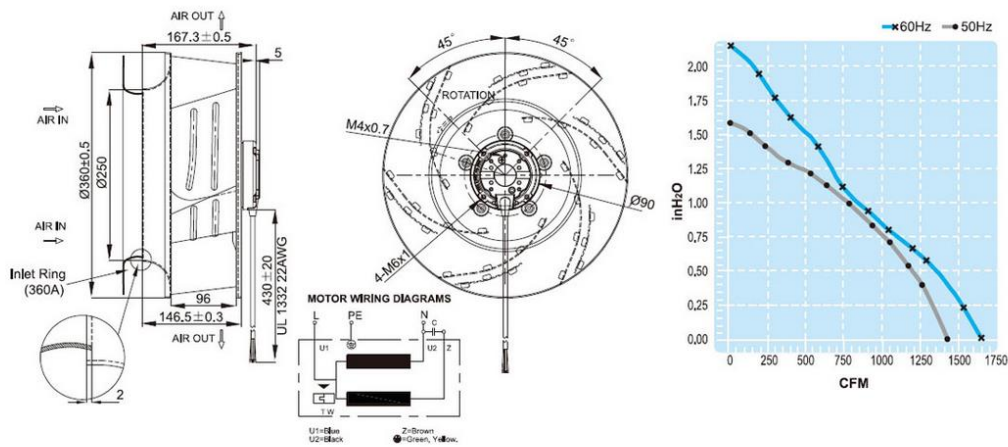

SAFETY APPROVAL

