




Centrifugal Fan

UF225(99)APA-F Series

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic or steel
Bearing System:	Ball bearing
Motor:	Shaded pole or capacitor start-run
Protection:	Impedance-Protected or Thermally-Protected or Electronically-Protected
Insulation Resistance:	Above 100MΩ, DC500V.
Dielectric withstand voltage	AC 1,500V (50/60Hz) one minute
Life Expectancy:	Ball bearing: Over 40,000 hr. (at 40°C)
Safety Approval:	CUL, CE, TUV, either UL or ETL.
Description of Model No.	UF 220 A P A 11 H1 C 2 A
	1 2 3 4 5 6 7 8 9 10

	UF225(99)APA11H1C2F	UF225(99)APA23H1C2F
Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	128/160 W	126/157 W
Rated Current	1.16/1.41 A	0.57/0.7 A
Locked Current	2.22/2.3 A	1.14/1.15 A
Speed	2650/2950 RPM	2650/2950 RPM
Maximum Air Flow	14/15.5 m ³ /min.	14/15.5 m ³ /min.
Maximum Air Flow	495/547 CFM	495/547 CFM
Maximum Pressure	48/63 mmH2O	48/63 mmH2O
Maximum Pressure	1.9/2.5 InchH2O	1.9/2.5 InchH2O
Noise	69/71 dB	69/71 dB
Weights	2.6 kg	2.6 kg

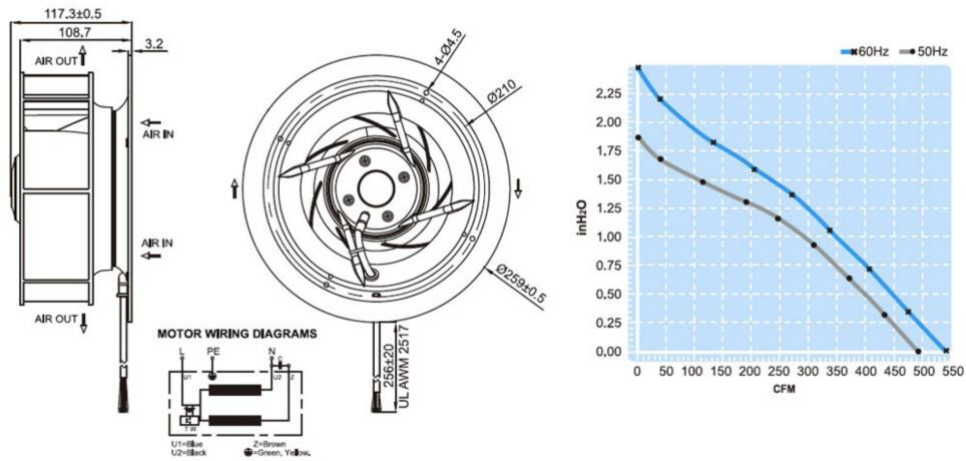

SAFETY APPROVAL

