




Cross Flow Fan
UF9029 Series

Frame:	Steel with black painting
Impeller:	Plastic & Aluminum
Bearing System:	Ball bearing or sleeve bearing
Motor:	Capacitor start-run or Shaded pole
Protection:	Impedance-Protected or Thermally-Protected
Insulation Resistance:	Above 100MΩ,DC 500V.
Dielectric Withstand Voltage	AC1, 500V (50/60Hz) one minute
Safety Approval:	CE, TUV. (UF9029 has UL, CUL approval)
Description of Model No.	UF 12 A (R) 11 B T H N
	1 2 3 4 5 6 7 8 9

	UF9029CBP12HL	UF9029CBP23HL
Rated Voltage	120 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	33/31 W	33/31 W
Rated Current	0.28/0.27 A	0.14/0.13 A
Locked Current	0.4/0.4 A	0.2/0.19 A
Speed	1350/1560 RPM	1350/1560 RPM
Maximum Air Flow	4.5/5 m ³ /min.	4.5/5 m ³ /min.
Maximum Air Flow	159/177 CFM	159/177 CFM
Maximum Pressure	2.2/3.3 mmH2O	2.2/3.3 mmH2O
Maximum Pressure	0.09/0.13 InchH2O	0.09/0.13 InchH2O
Noise	43/46 dB	43/46 dB
Weights	3 kg	3 kg

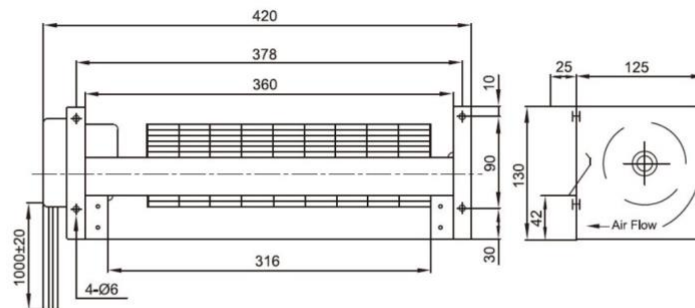

SAFETY APPROVAL

