





Centrifugal Fan
UF133(91)APA Series

Frame/Housing:	Aluminum die-casting									
Impeller:	Plastic or steel									
Bearing System:	Ball bearing									
Motor:	Shaded pole or capacitor start-run									
Protection:	Impedance-Protected or Thermally-Protected or Electronically-Protected									
Insulation Resistance:	Above 100MΩ, DC500V.									
Dielectric withstand voltage	AC 1,500V (50/60Hz) one minute									
Life Expectancy:	Ball bearing: Over 40,000 hr. (at 40°C)									
Safety Approval:	CUL, CE, TUV, either UL or ETL.									
Description of Model No.	UF	220	A	P	A	11	H1	C	2	A
	1	2	3	4	5	6	7	8	9	10

	UF133(91)APA11H1S2A	UF133(91)APA23H1S2A
Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	42/41 W	40/39 W
Rated Current	0.5/0.43 A	0.24/0.21 A
Locked Current	0.83/0.72 A	0.39/0.34 A
Speed	2780/3200 RPM	2780/3200 RPM
Maximum Air Flow	4.66/5.33 m ³ /min.	4.66/5.33 m ³ /min.
Maximum Air Flow	165/188 CFM	165/188 CFM
Maximum Pressure	16.6/22.4 mmH2O	16.6/22.4 mmH2O
Maximum Pressure	0.65/0.88 InchH2O	0.65/0.88 InchH2O
Noise	50/60 dB	50/60 dB
Weights	0.9 kg	0.9 kg

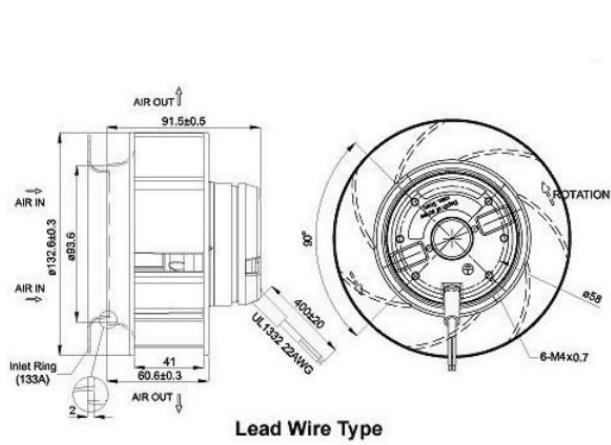

(Centrifugal Fan)

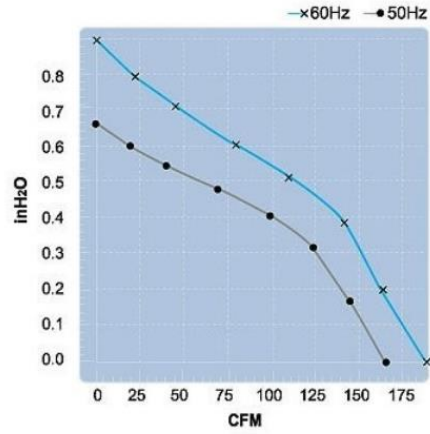

SAFETY APPROVAL

