




Blower Fan **UF160DPB Series**

Frame/Housing:	Aluminum die-casting
Impeller:	Plastic or steel
Bearing System:	Ball bearing
Motor:	Shaded pole or capacitor start-run
Protection:	Impedance-Protected or Thermally-Protected or Electronically-Protected
Insulation Resistance:	Above 100MΩ, DC500V.
Dielectric withstand voltage	AC 1,500V (50/60Hz) one minute
Life Expectancy:	Ball bearing: Over 40,000 hr. (at 40°C)
Safety Approval:	CUL, CE, TUV, either UL or ETL.
Description of Model No.	UF 220 A P A 11 H1 C 2 A
	1 2 3 4 5 6 7 8 9 10

	UF160DPB11H1S2A	UF160DPB23H1S2A
Rated Voltage	115 V	230 V
Frequency	50/60 Hz	50/60 Hz
Input Power	50/52 W	50/53 W
Rated Current	0.7/0.6 A	0.4/0.3 A
Locked Current	0.94/0.8 A	0.46/0.4 A
Speed	2700/2900 RPM	2700/2900 RPM
Maximum Air Flow	3.3/3.6 m ³ /min.	3.3/3.6 m ³ /min.
Maximum Air Flow	118/126 CFM	118/126 CFM
Maximum Pressure	33/46 mmH ₂ O	33/46 mmH ₂ O
Maximum Pressure	1.3/1.8 Inch	1.3/1.8 Inch
Noise	63/65 dB	63/65 dB
Weights	1.73 kg	1.73 kg

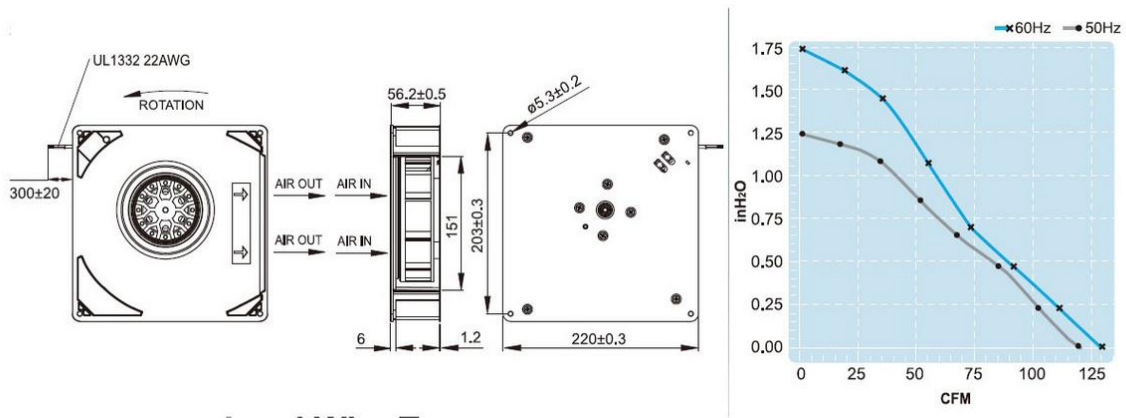

SAFETY APPROVAL

